

# Cell Phone Accident Preventer to Eliminate the Risk of Accidents during Driving

S. Kanakaraj<sup>1</sup>, C. Kamalanathan<sup>2</sup>, S. Valarmathy<sup>3</sup>

PG Scholar, Embedded Systems, Bannari Amman Institute of Technology, Erode, India<sup>1</sup>

Assistant Professor (Sr. G), Department of ECE, Bannari Amman Institute of Technology, India<sup>2</sup>

Professor & Head of the Department, Department of ECE, Bannari Amman Institute of Technology, India<sup>3</sup>

**Abstract:** Conversing on cell phones while driving is as calamitous as driving our car after drinking which can lead to various disastrous major miss incidents. Do you know that using a mobile phone while driving can influence the cognitive functions of persons, amuse his or her visual concentration and also the speed of processing message. It has been also confirm that use of cell phones while driving puts a driver at an extremely higher risk of collision by distracting their mind. It matters even if the person makes use of hands free or hand-held phones, which has no escape to it. This deadly combo has crunch increased the risk of accidents in range numbers. The theme of this project is to make the driver to attend only the emergency calls. Initially driver should enable call forward to system number. When a call is made to driver, the caller will receive a message intimating that he is in driving. If once again he calls the driver then it is understood that it is crunch. So the driver will get an intimation regarding the emergency call through LCD display. If he wants to make a call, he must stop the car. Unless the system will recognize in such a way that the driver is speaking in mobile phone while driving. It automatically reduces the car fuel supply by variable Solenoid so that the driver will have time to park the car. Thus the system prevents accidents due to phone calls.

**Keywords:** GSM Module, Mobile Phone Sniffer ,DC Motor, Solenoid valve, Flow sensor, RPM Sensor.

## I. INTRODUCTION

Every year nearly 1.4 million people have been assassinated because of they are wireless patrons and their over-bearing cell phones. While in India, an estimated 1.35 lacs person died due to road accident in 2010, which is almost 10% of road accident fatalities worldwide and these figures are the highest in the world. Still no research has been carried out to treasure trove the number of drivers using cell phone involved in road accident and very limited attempt has been carried out to forestall accident due to cell phone usage.

In existing systems as vehicle manufacturers continue to increase their insistence on safety with advanced driver-assistance systems (ADASs), we nominate a device that is not only already in prosperity but portable enough as well to be one of the most effectual multipurpose devices that are able to analyse and advise on safety conditions.

Today Mobile smart phones are furnished with numerous sensors that can help to aid in safety enhancements for drivers on the road. We use the 3-axis accelerometer of an Android-based smart phone to record and analyse various driver behaviours and external road conditions that could potentially be dicey to the health of the driver, and the automobile.

The use of these data can educate a potentially treacherous driver on how to safely and efficiently operate a vehicle and with real-time analysis and auditory alerts of these factors it can increase a driver's overall awareness to maximize safety.

## II. PROPOSED APPROACH

With the aim of preventing these accidents, we proposed to develop a highly potent automatic system for early detection of incoming and outgoing call, with the help of an antenna along with mobile disclosure unit above the driver seat.

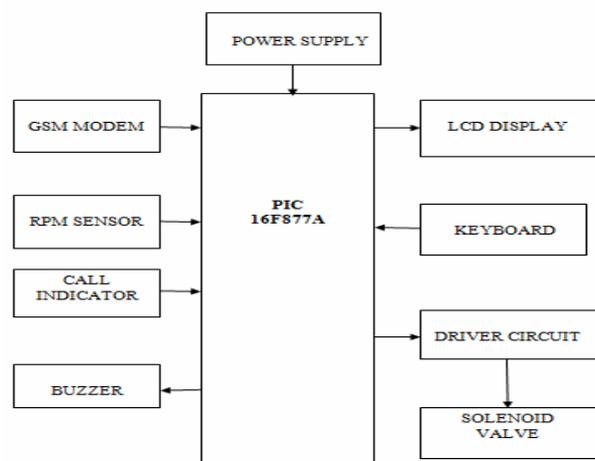


Fig.1 Block diagram

This unit shown in fig: 2 is capable of differentiating whether the cell phone used either by the driver or by the commuter; if the driver uses of cell phone is detected, a safety application named Cell phone Accident Forestaller will be automatically load on the driver's cell phone which helps in eradicating the risk of accidents from being occurred and at the same time ensuring that the user does not miss any emergency call.

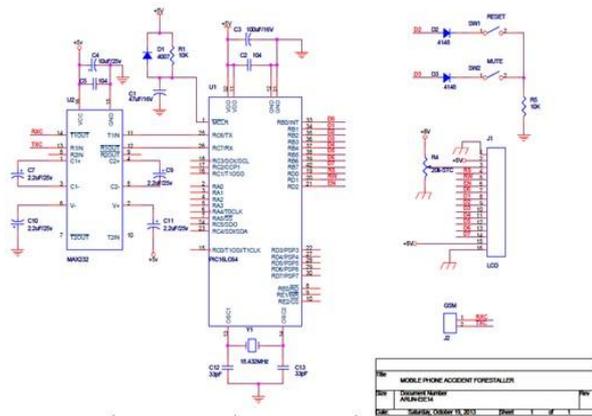


Fig.2 Master board circuit

It shows how the sniffer system shown in fig: 2 will help in forestalling accidents and to what extent this system will help in compressing the Indian economic loss sustain unnecessarily due to road accident fatalities.

### III. COMMUNICATION DEVICES

#### A. MAX - 232

The MAX 232 is a unified circuit that converts signals from an RS-232 serial port to signals good enough for use in TTL compatible digital logic circuits and it is a dual driver / receiver and typically disciplines the RX, TX, CTS and RTS signals. This drivers provide RS-232 voltage level outputs (approx.±7.5V) from a single +5V quantity via on-chip charge pumps and external capacitors which makes it useful for implementing RS-232 in devices that differently do not need any voltages farther the 0 V to +5V range, as power supply design does not need to be made more problematic just for driving the RS-232 in this case.

The receivers compress RS-232 inputs (which may be a shigh as±25V), to norm 5V TTL levels. These receiver shave a quint essential threshold of 1.3V with a typical hysteresis is of 0.5V. The MAX 232 A is backwards compatible with the authentic MAX 232 but may operate at higher baud estimates and can use smaller external capacitors—0.1µ Fin place of the 1.0µ F capacitors worn with the original device.

#### B. GSM Module

A GSM modem is a functional type of modem which accepts a SIM card and operates over a contribution to a mobile operator like a cellular phone. A GSM modem exposes an interface that allows applications such as message to send and receive messages over the modem interfacing part.

The mobile operator allegation for this message sending and receiving as if it was performed directly on a cellular phone. To perform these tasks, a GSM modem must backing an “extended AT command” for conversing messages. The interfacing betwixt the GSM and the Microcontroller and the advanced module is shown in the fig: 5.

### IV. SOFTWARE ANALYSIS

#### A. About Software

The main purpose of using the microcontroller in our project is because highwork CMOS 8-bit microcontroller with 8K bytes of in-structure programmable Flash memory. By combining a versatile 8-bit CPU a with in-structure programmable Flash on a imposing chip, the Microchip16F877A is a powerful microcontroller which provides a highly-malleable and cost-effective solution to many ingrained control applications. The programs of the microcontroller have been drafted in Embedded C language and were compiled using MPLAB, a compiler used for microcontroller programming. The conversation between PC and the microcontroller was entrenched MAX 232 standard and those programs were also done in C language. The following programs are used at various stages for the mentioned functions Serial communication. The various special function registers of the microcontroller are set such that they can send and receive data from the PC which uses the serial library to communicate with the ports.

#### B. Support for all 16F Variants

The PIC Family is one of the fastest growing Microcontroller planning’s. More than 400 device variants from various silicon vendors are today available. New extended PIC Devices, like the Philips 80C51MX architecture are zealous for large utilization with several Mbytes code and data space. For flawless support of these different PIC variants, MPLAB provides the several development tools. A new output file format (OMF2) allows direct backing of up to 16MB code and data space. The CX51 compiler is a variant of the PIC compiler that is design for the new PIC 18F architecture.

#### C. Proteus

Proteus VSM is used to bridge the gap between schematic and PCB for embedded design, contribution system level simulation of microcontroller based designs inside the simplified package itself.


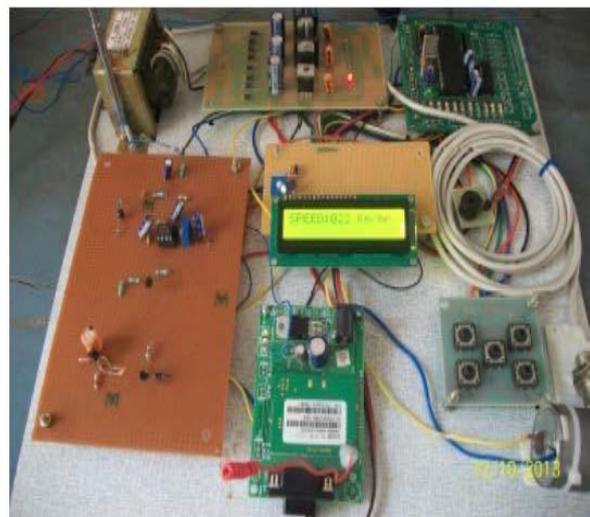



Fig.6 Prototype

V. EXPERIMENTAL RESULTS


A. Accidental Injury Rate (per lakhs of population) in India

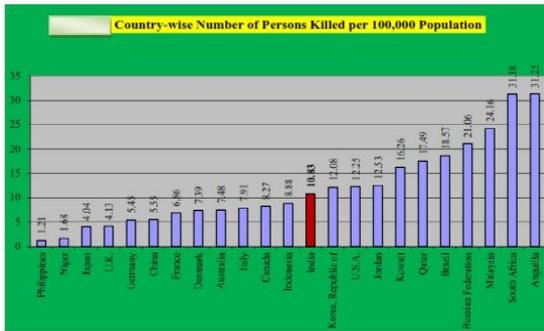

B. Comparative Status of Road Accidents in India and China

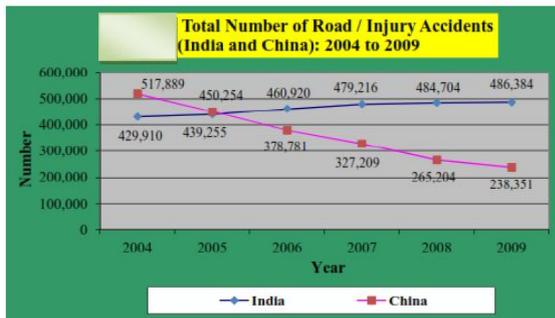

C. Accidents and Deaths per 10000 Vehicle

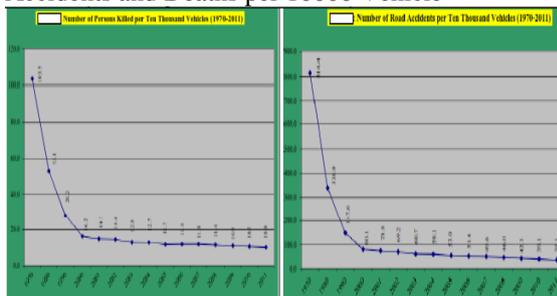

VI. CONCLUSION

To forestall the occurrence of accident due to mobile phone use by drivers an pursuit has been made to provide a low cost, non invasive; small size system. Sensing circuit is used to detect the driver’s use of mobile phone, possessing the ability to chunk the mobile communication only in the driver seating area while affording an option for the driver to attend an emergency call if he stops a vehicle at a safe.

REFERENCES

[1]. Annual statistical report, Eur. Road Safety Observatory, 2008. [Online]. Available: [http://ec.europa.eu/transport/wcm/road\\_safety/erso/safetynet/content/safetynet.html](http://ec.europa.eu/transport/wcm/road_safety/erso/safetynet/content/safetynet.html)

[2]. A. Broadhurst, S.Baker, and T. Kanade, “A prediction and planning framework for road safety analysis, obstacle avoidance and driver information,” in Proc. 11th World Congr. Intell. Transp. Syst., Oct. 2004, pp. 1–26

[3]. Hassan Hosseinnia, Inés Tejado, Vicente Milanés, Jorge Villagrà, and Blas M. Vinagre “Experimental Application of Hybrid Fractional-Order adaptive cruise control at low speeds.”IEEE transactions on control systems technology, vol. 22, no. 6, november 2014.

[4]. J. Hillenbrand, A. Spieker, and K. Kroschel, “A multilevel collision mitigation approach—Its situation assessment, decision making, and performance tradeoffs,” IEEE Trans. Intell. Transp. Syst., vol. 7, no. 4, pp. 528–540, Dec. 2006.

[5]. J. Jansson and F. Gustafsson, “A framework and automotive application of collision avoidance decision making,” Automatica, vol. 44, no. 9, pp. 2347–2351, Sep. 2008.

[6]. M. Distner, M. Bengtsson, T. Broberg, and L. Jakobsson, “City safety— A system addressing rear- end collisions at low speeds,” in Proc. 21stEnhanc. Safety Veh. Conf., Stuttgart, Germany, 2009, paper 09-0371.

BIOGRAPHY



**Kanakaraj. S** (M’14) received the B.E. degree in Electrical and Electronics Engineering from CHRIST THE KING ENGINEERING COLLEGE, karamadai, Coimbatore, Tamilnadu, India and Post Graduate degree in Embedded Systems from Bannari Amman Institute of Technology. His research and academic interests include Electrical Machines, Communication Engineering, Sensors and Transducers, Embedded Systems.